


SP52 Series Dimension Diagram(unit: mm)

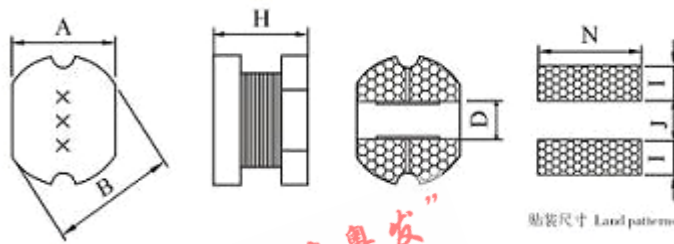

TYPE	A(± 0.3)	B(± 0.3)	H(± 0.3)	D	N	I	J
SP52	5.2	5.8	2.1	1.6	5.5	2.5	1.2

SP52 Series Electrical Characteristics:

PART NO.	L (μH)	L TEST	DCR (Ω)	IDC (A)
	INDUCTANCE	FREQUENCY	MAX	MAX
SP5820-2R2M	2.2	7.96 MHZ	0.039	2.16
SP5820-2R7M	2.7	7.96 MHZ	0.044	2.08
SP5820-3R3M	3.3	7.96 MHZ	0.049	1.90
SP5820-3R9M	3.9	7.96 MHZ	0.056	1.84
SP5820-4R7M	4.7	7.96 MHZ	0.062	1.60
SP5820-5R6M	5.6	7.96 MHZ	0.078	1.44
SP5820-6R8M	6.8	7.96 MHZ	0.091	1.36
SP5820-8R2M	8.2	7.96 MHZ	0.103	1.12
SP5820-100K	10	2.52 MHZ	0.133	1.04
SP5820-120K	12	2.52 MHZ	0.148	0.96
SP5820-150K	15	2.52 MHZ	0.166	0.88
SP5820-180K	18	2.52 MHZ	0.213	0.77
SP5820-220K	22	2.52 MHZ	0.248	0.73
SP5820-270K	27	2.52 MHZ	0.328	0.64
SP5820-330K	33	2.52 MHZ	0.378	0.58
SP5820-390K	39	2.52 MHZ	0.438	0.54
SP5820-470K	47	2.52 MHZ	0.546	0.49

SP5820-560K	56	2.52 MHZ	0.621	0.45
SP5820-680K	68	2.52 MHZ	0.715	0.41
SP5820-820K	82	2.52 MHZ	1.000	0.35
SP5820-101K	100	1 KHZ	1.070	0.34
SP5820-121K	120	1 KHZ	1.250	0.32
SP5820-151K	150	1 KHZ	1.660	0.26
SP5820-181K	180	1 KHZ	1.900	0.23
SP5820-221K	220	1 KHZ	2.440	0.21
SP5820-271K	270	1 KHZ	2.730	0.19

Notes:

1, the inductance tolerance: J +5%; K +10%; L +15%; M +20%, customers can choose according to their own conditions, inductance tolerance!

2, if the standard exceeds the requirements of the above, you can also customize the product according to customer's needs!

“电感品质佳，选粤发”
www.yfbalun.com
Tel:+86-756-3806076

“电感品质佳，选粤发”
www.yfbalun.com
Tel:+86-756-3806076