

Features:

- ◆ Frequency Range: 2 to 1500 MHz
- ◆ Surface mount and available in tape and reel
- ◆ 260°C reflow compatible
- ◆ RoHS Compliant and Pb free
- ◆ Operating temperature range: -40°C to +85°C
- ◆ Storage temperature range: -55°C to +100°C




Applications:

- ◆ For catv
- ◆ For broadband and wireless communications


Dimension diagram (Unit:mm) :



Electrical structure:

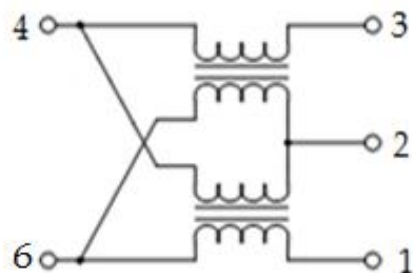

Recommended layout(mm):

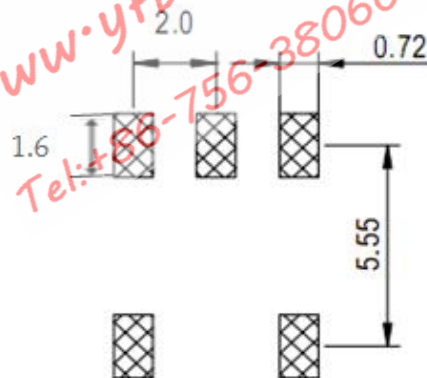


DRAW BY	yang lin	CHECKED BY	ye yong jun	APPROVED BY	deng gao
---------	----------	------------	-------------	-------------	----------

Pin configuration

Pin no.	Function
1	Input
2	Ground
3	Coupled
4	Isolated
6	Output

Application circuit :

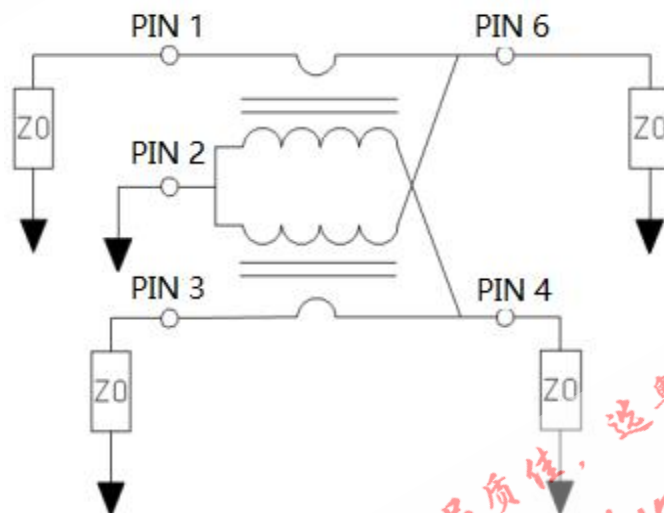

Electrical Specifications:

$T_A = 25^\circ C$ $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss	2-1500MHz	dB		0.50	2.50
Coupling	2-1500MHz	dB	—	15.80	±0.8
Input Return Loss	2-1500MHz	dB	16.00	25.00	—
Output Return Loss	2-1500MHz	dB	16.00	30.00	—
Coupling Return Loss	2-1500MHz	dB	16.00	21.00	—
Isolation	2-1500MHz	dB	16.00	20.00	—

DRAW BY

yang lin


CHECKED BY

ye yong jun


APPROVED BY

deng gao


Main line Loss(pin1-6):

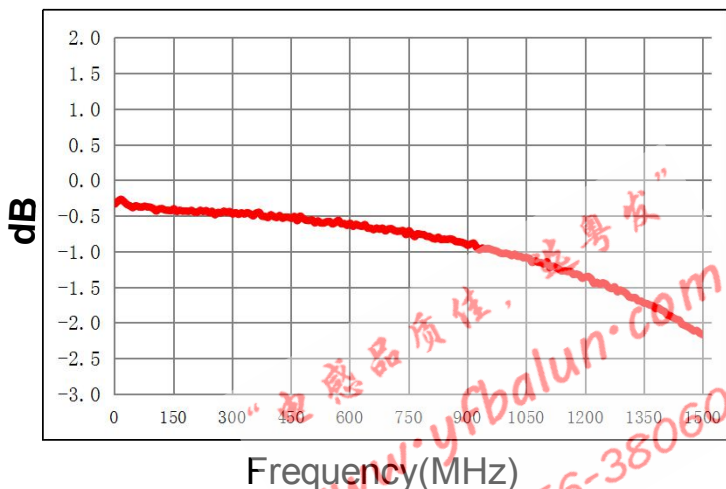


Coupling(pin1-3):

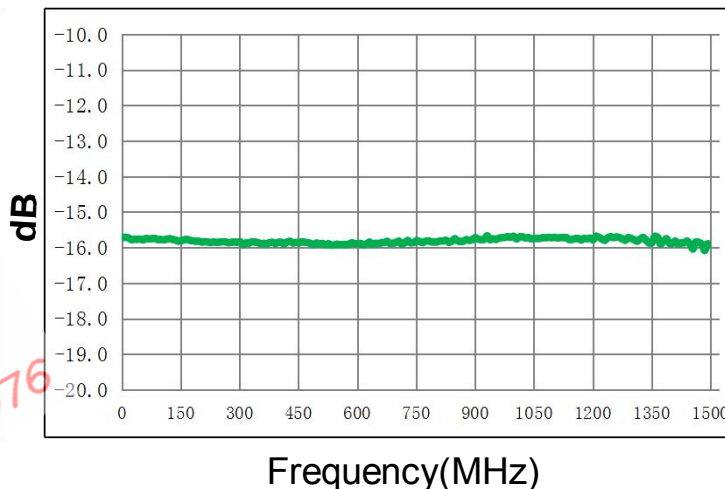


Input Return Loss (Pin1)

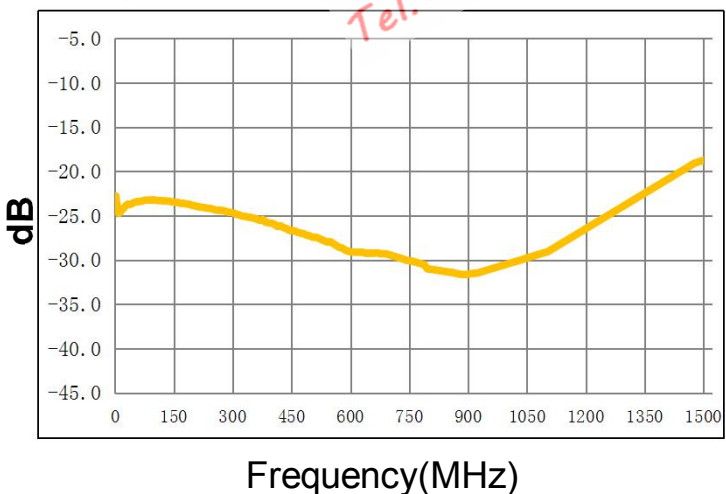


Output Loss (Pin2)

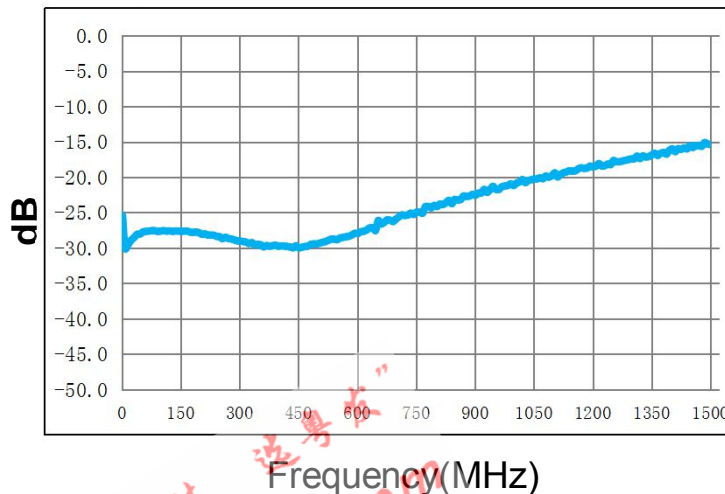

Coupling Return Loss (Pin3)

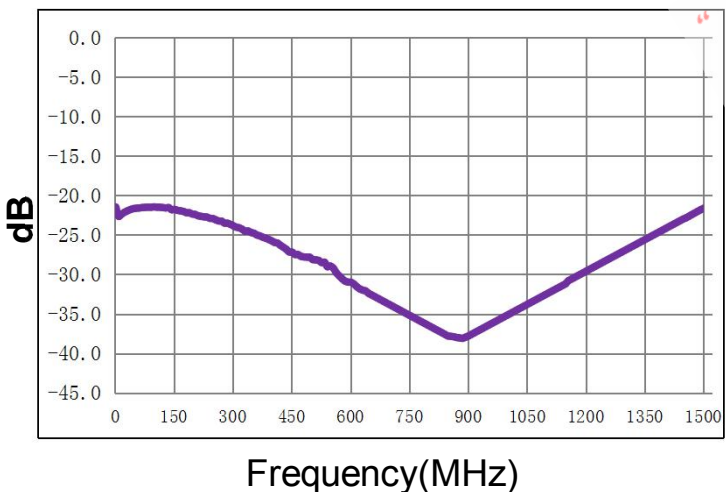

Isolation (Pin1-4)

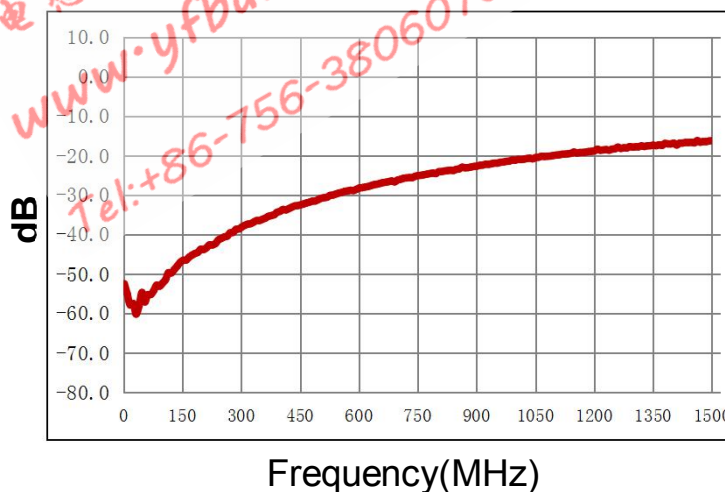

DRAW BY

yang lin

CHECKED BY


ye yong jun

APPROVED BY


deng gao

Recommended Soldering Temperature Graph:

建议迴焊条件
The condltion of reflow
(Recommendation)

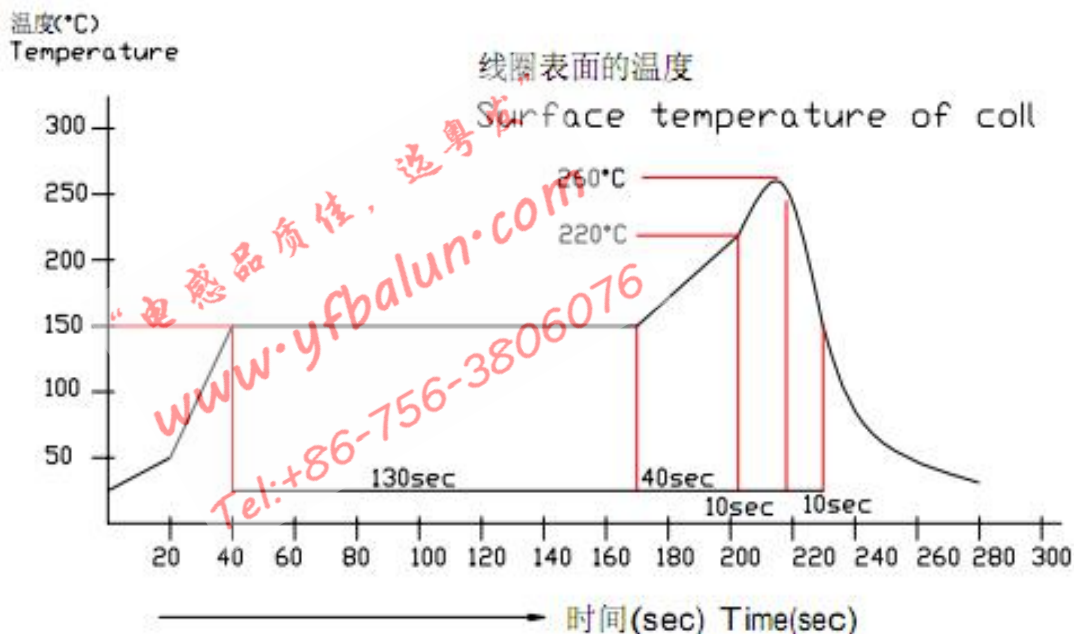

Packing Dimension For Caeier Tape(UNIT:mm):

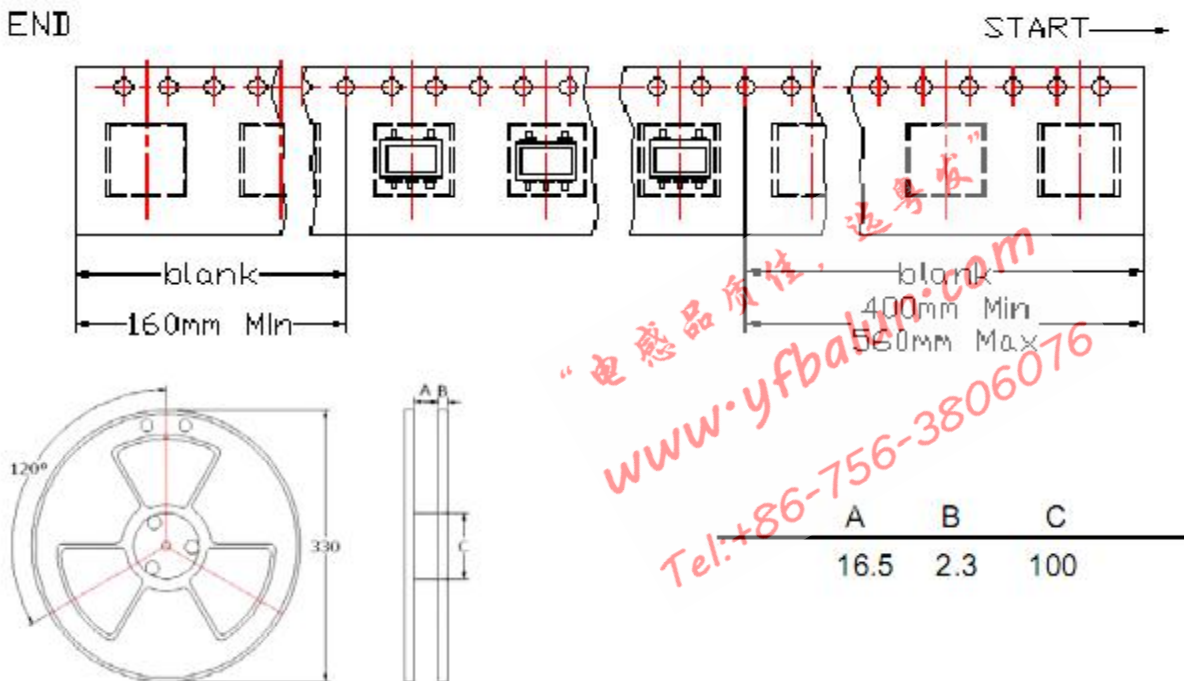

QUANTITY

1,000PCS/Reel

3Reels/Middle Carton

5 Middle Cartons/Big Carton/15,000pcs

DRAW BY

yang lin

CHECKED BY

ye yong jun

APPROVED BY

deng gao