


1、 DIMENSION DIAGRAM (Unit: mm)

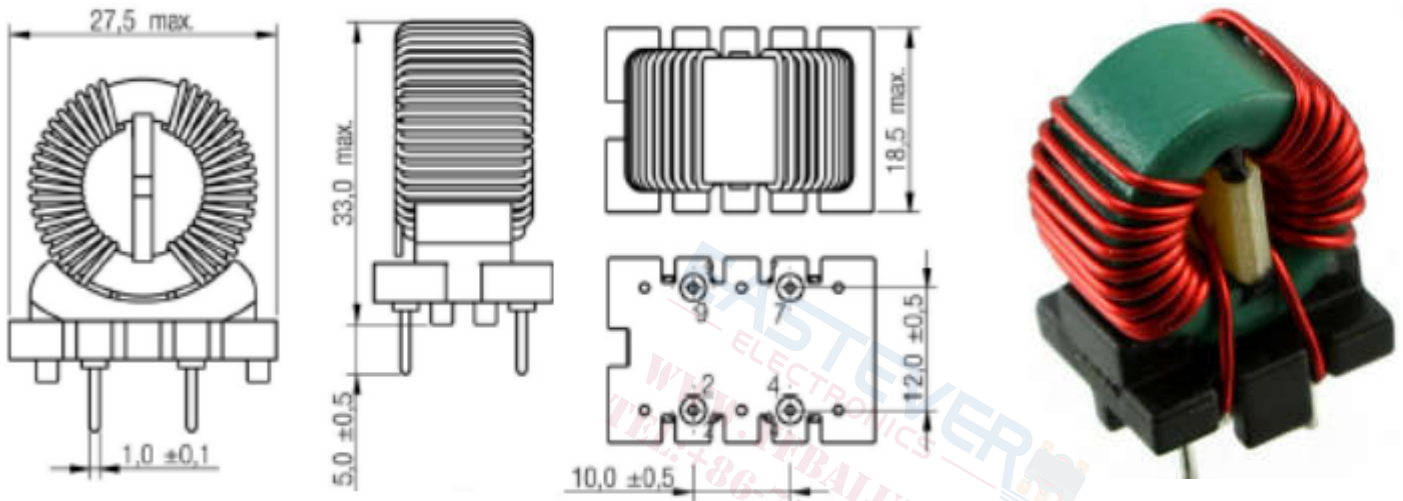

2、 BILLOF MATERIALS

3、 ELECTRICAL STRUCTURE

CORE:T20X10X10C-R10K


CASE: CASE-005

WIRE: 2UEW-0.55

SPACER:12.0X9.0X1.0

EPOXY:G500/H210

SOLDER:Sn99.3Cu0.7

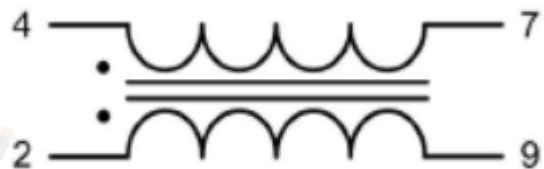

4、 ELECTRICAL CHARACTERISTICS:

TEST FREQUENCY : 10KHz/0.3V(TH2776B)

INDUCTANCE : 1-4=2-3=20.0mH Min

RDC : 1-4=2-3=0.30Ω Max

TURNS RATIO : (2-9):(4-7)=1:1±3%

HI-POT TEST : (2-4)1500V/AC 5mA/2Sec