


RoHS Compliant at Peak Reflow Solder Temperature rating 240°C

### Electrical Specifications: @25°C

- Turns Ratio: PRI/SEC 3CT: 10CT  $\pm 5\%$
- Isolation Voltage: 500 Vrms (Input to Output) 60s
- OCL: 1.5uH Minimum @1KHz 1V(P1-3, P6-8)
- OCL: 11.5uH Minimum @1KHz 1V(P16-14, P11-9)
- CW/W: 10pF Maximum @100KHz 100mv
- DCR: 0.8 Ohms Maximum
- LL: 0.8uH Maximum @100KHzz100mv

EASTEVER ELECTRONICS  
www.yfbalun.com  
Tel:+86-756-8898808

### Mechanicals:

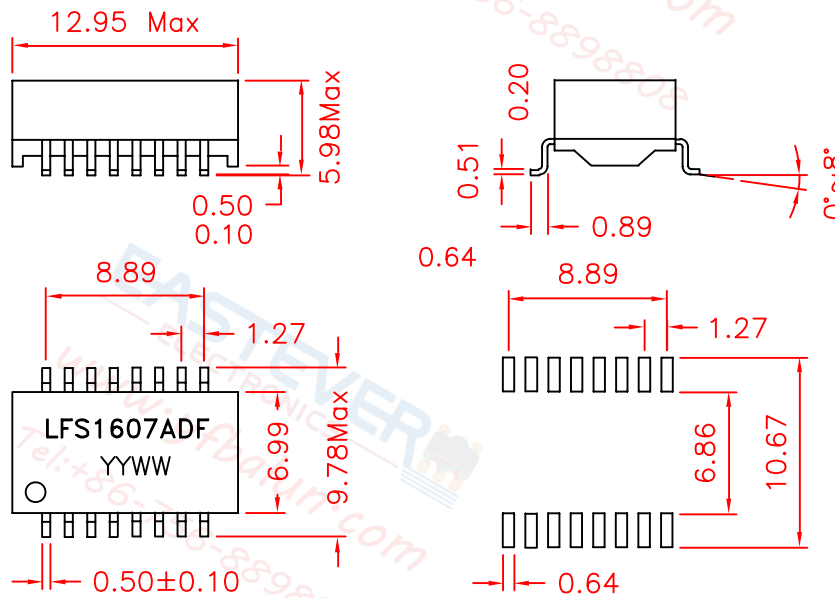

SUGGESTED PCB PAD LAYOUT

### Schematics:

